European Group 2 Gear Motors

MARZOCCHIPOMPE
HIGH PRESSURE GEAR PUMPS

Basic Design:	External gear
Body:	Aluminium
Flange and cover:	Aluminium
Recommended Filtration:	20/18/15 (ISO 4406)
Viscosity range:	From 6 to 500cSt
Temperature range:	-15°C to 80°C using standard seals
Fluids	Best performance with std mineral oils
Max Drain Pressure:	6 Bar

ALM2 Series Gear Motors

Standard with European Group 2 Mounting Flange, 36.5mm spigot, 1:8 tapered shaft and 4 bolt flanged ports

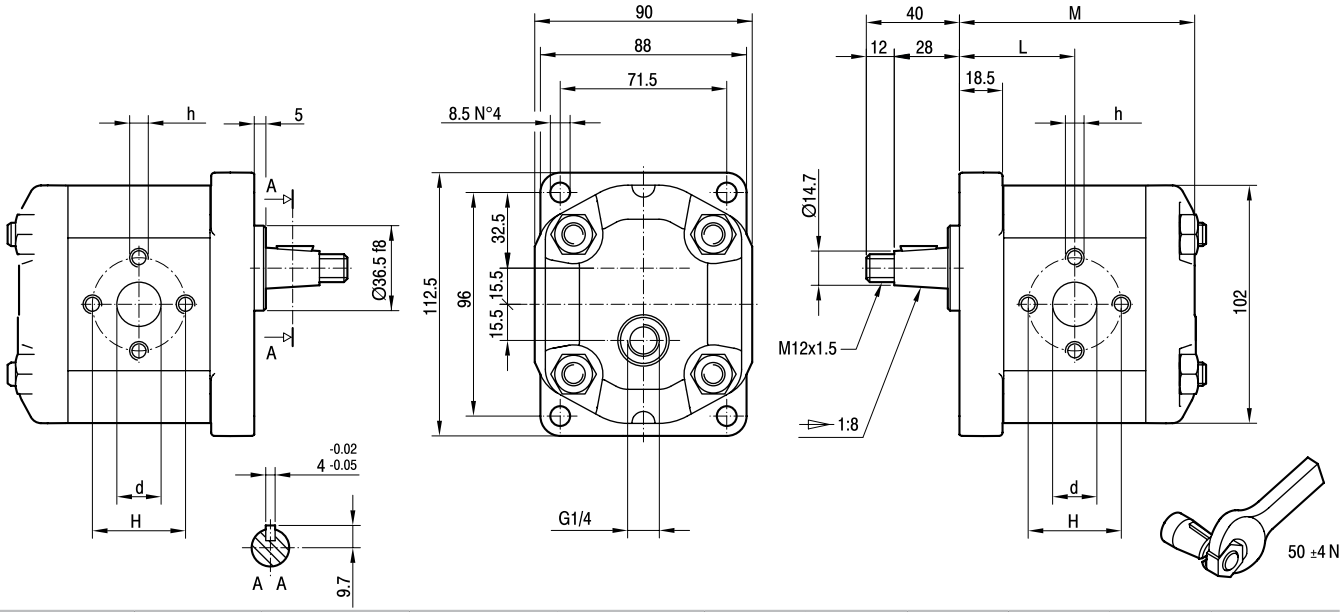

Part Number	Displ cm3/rev	Max Pressure (Bar)			Dimensions					Max Speed (rpm)
		Contin'	Interm'	Peak	L	M	d	h	H	
ALM2-R-6-E1	4,5	250	240	270	45,5	93,5	13	M6	30	4000
ALM2-R-9-E1	6,4	250	240	270	47	96,5	13	M6	30	4000
ALM2-R-10-E1	7	250	240	270	47,5	97,5	13	M8	40	4000
ALM2-R-12-E1	8,3	250	240	270	48,5	99,5	13	M8	40	3500
ALM2-R-13-E1	9,6	250	240	270	49,5	101,5	13	M8	40	3000
ALM2-R-16-E1	11,5	230	220	250	51	104,5	19	M8	40	4000
ALM2-R-20-E1	14,1	230	220	250	53	108,5	19	M8	40	4000
ALM2-R-22-E1	16,0	210	200	225	54,5	111,5	19	M8	40	4000
ALM2-R-25-E1	17,9	210	200	225	56	114,5	19	M8	40	3600
ALM2-R-30-E1	21,1	180	170	195	58,5	119,5	19	M8	40	3200
ALM2-R-34-E1	23,7	180	170	195	60,5	123,5	19	M8	40	3000
ALM2-R-37-E1	25,5	170	160	185	62	126,5	19	M8	40	2800
ALM2-R-40-E1	28,2	170	160	185	64	130,5	19	M8	40	2500