


Accessories

CC Series Hydraulic Cable Cutters



- 5 - 44 Tn
- 700 Bar
- Each tool is supplied with a lightweight plastic carrying case, affording excellent tool protection and transportability
- Rotary cutting heads can be mounted in several positions to ease cutting in tight workspace
- Single acting models have spring return
- Blade replacement is exceptionally simple
- Models with integral pumps available - CC0018, CC0040, CC0075
- Models without integral pump are supplied with 3/8" NPT

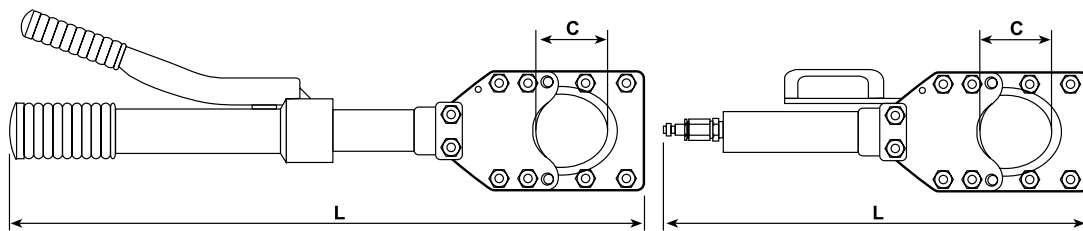

Part Number	Capacity kN	L mm	C mm	Weight Kg	Wire Rope		Cable			Steel Rope		Bar		
					Alu-minium with copper ø Ext. mm	Alu-minium with steel ø Ext. mm	Tele- phone ø Ext. mm	Lead Shielded ø Ext. mm	Under- ground ø Ext. mm	Max. Strength 1.800 N/mm ²		Steel	Copper Alloy	Alu- minium Alloy
										ø Ext. mm	Wire ø Ext. mm			
								ø Ext. mm	ø Ext. mm	ø Ext. mm	ø Ext. mm	ø Ext. mm		
CC.00.18	50	385	18	2.8	18	18	18	18	18	1	18	12	15	15
CC.01.18	50	212	18	2	18	18	18	18	18	1	18	12	15	15
CC.00.40	140	490	41.5	5.6	40	40	40	40	40	32	2	20	30	30
CC.01.40	135	290	41.5	4.5	40	40	40	40	40	32	2	20	30	30
CC.00.75	70	650	75	6.8	40	*	75	75	75	*	*	*	*	*
CC.01.75	70	451	75	5.5	40	*	75	75	75	*	*	*	*	*
CC.01.90	110	535	90	9.4	35	*	90	90	90	*	*	*	*	*
CC.01.120	135	630	122	11.7	35	*	120	120	120	*	*	*	*	*
CC.01.60	437	380	60	12	60	60	*	*	*	60	3	25	35	35
CC.02.60	390	490	64	12	60	60	*	*	*	60	3	25	35	35